



STOP SIGN PLAN VIEW

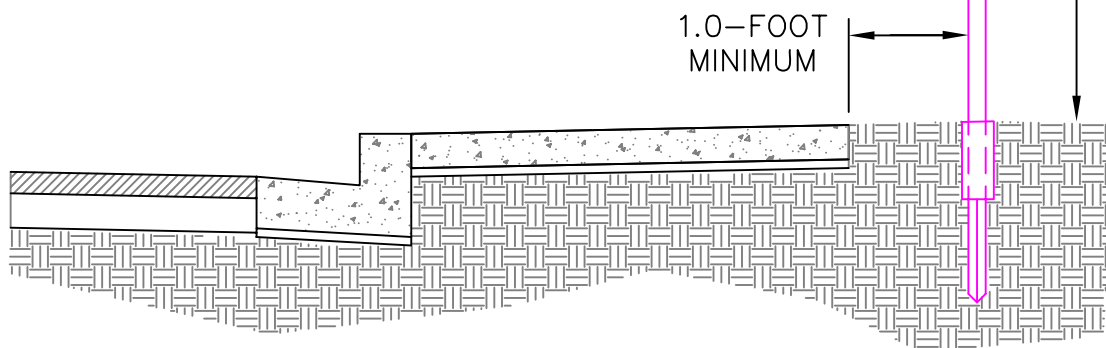

STOP SIGN SECTION VIEW

NOTES:

1. MAINTAIN A MINIMUM OF 1 FOOT OF CLEARANCE BETWEEN THE SIGN POST AND THE BACK EDGE OF THE SIDEWALK.
2. WHEN V-LOCK SIGN ANCHORS ARE INSTALLED IN AREA OF PRE-EXISTING SIDEWALKS, THE SIDEWALK MUST BE REMOVED IN 5-FOOT PANELS AND WIDENED PER THIS DETAIL.
3. STOP SIGNS WILL TYPICALLY BE PLACED 14 FEET FROM THE FACE OF THE CURB ON THE STREET THEY APPROACH. EXACT LOCATION OF THE SIGN AND ANCHOR WILL BE ESTABLISHED BY THE CITY AT THE TIME OF INSTALLATION.
4. ALL CONSTRUCTION AND MATERIALS SHALL MEET THE SPECIFICATIONS AND BE APPROVED BY THE CITY OF EPHRATA.

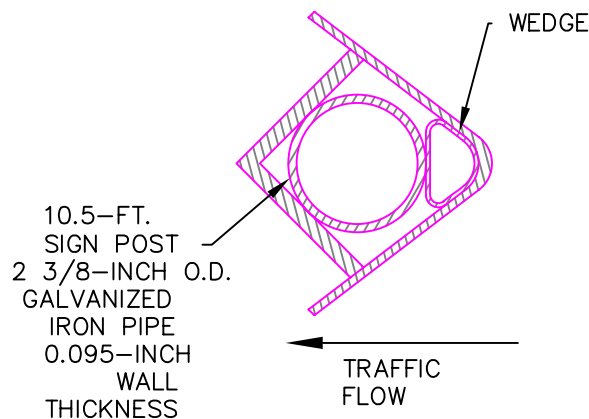

V-LOCK SIGN ANCHOR

STOP SIGN INSTALLATION

EPHRATA PUBLIC WORKS DEPARTMENT

CITY OF EPHRATA

DRAWN
CHECK
SCALE NONE
DATE 02-17



A-8

DATE	REVISION	BY

GRANT COUNTY

WASHINGTON